


Xtralis Integrated Security S3000 RDR

IP Reader

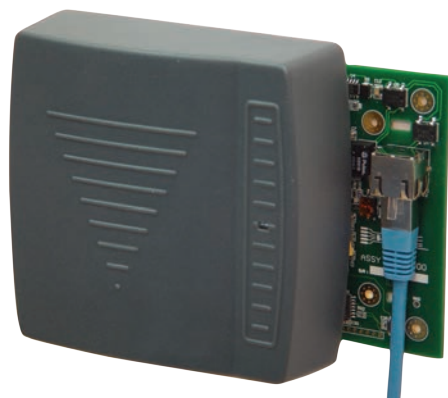

Key Benefits

- Full IP, with power-over-Ethernet
- Plug-and-use technology
- Parallel processing and load balancing
- Full system redundancy
- Linux OS
- Front control panel display
- Auto-configured host
- IT network standards
- HID® and/or Mifare® technology
- Spanning Tree Protocol
- Internal fail safe control

Description

The RDR IP reader is one of several network devices that make up the S3000 Access Control system taking full advantage of the existing IT network infrastructure and low cost structured cabling system (CAT5e or CAT6).

The RDR is an IP proximity card reader with built-in HID® and/or Mifare® technology. It supports plug-and-use technology, Power-over-Ethernet, strong encrypted TCP/IP communication (SSL), and automatic IP assignment (via LPU).

The S3000 access control system is fully interoperable with the Xtralis 3000 Series family of products, including the FastTrace 2/2E for video and audio recording and transmission, the V3500 for mass storage and archiving, and the V3001 for video wall applications.

Xtralis Security Solution product family



Tollfree in Western Canada: 1-888-388-1592
microwatt.com • mwsales@microwatt.com


SALES • SERVICE • SUPPORT




Xtralis Integrated Security S3000 RDR

IP Reader

Configuration

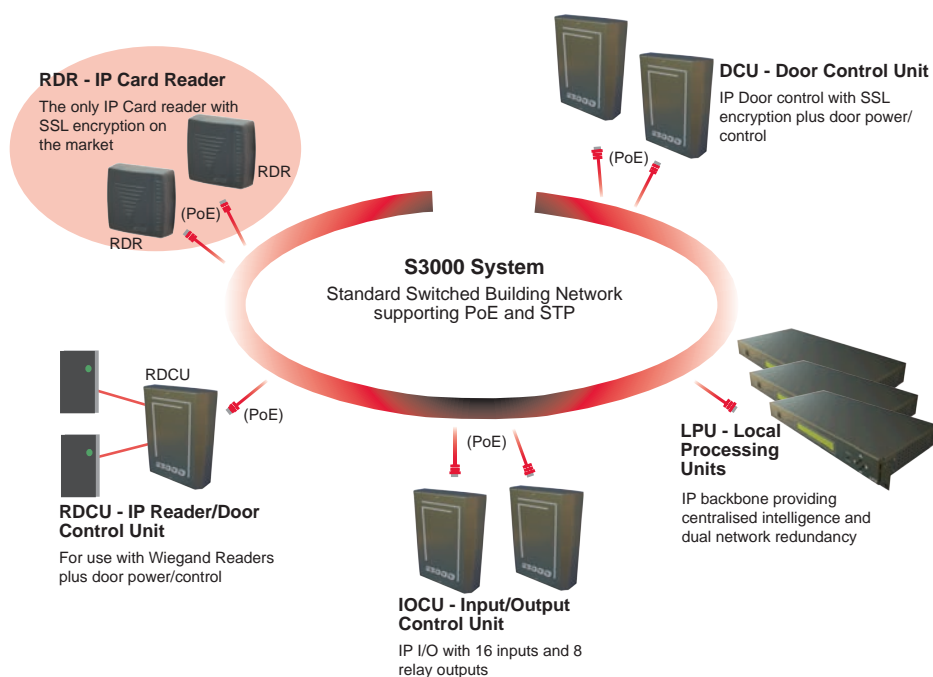

Block Diagram

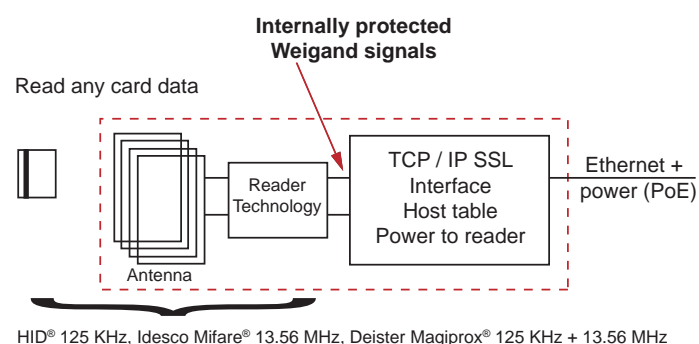

Specifications

Card compatibility	HID® 125 KHz / Mifare® 13.56 MHz technology
Reading distance	HID® +/- 1.2" (30 mm), Mifare®: +/- 20 mm (0.75")
Connection / Indicators	<ul style="list-style-type: none"> 10/100 BaseT (RJ45 CAT5e or CAT6) IEEE 802.3af PoE compliant Multicoloured LEDs (ready/busy/error), Buzzer
Protocol	Strong encrypted (SSL) TCP/IP, DHCP, ARP, ICMP, SSH, IPv4, IPv6 ready
Operational modes	<ul style="list-style-type: none"> Intelligent access control proximity reader Database on Local Processing Unit(s) Redundancy by multiple LPU's
Software	M3000: Windows-based security management software
Housing	<ul style="list-style-type: none"> Dimensions (HxWxD): 130 mm x 120 mm x 40 mm (5.1"x 4.7"x 1.6") - Indoor Colour: RAL 7016 Weight: 0.285 kg (0.63 lbs) IP44
Power supply	Powered over Ethernet (IEEE 802.3af PoE) Max 12 Watt
Temperature – Humidity	Operational temperature: 0 - 40°C (32 – 104°F) 0 - 95% RH non-condensing
Product code	<ul style="list-style-type: none"> S3000 RDR IP Proximity card reader HID® 125 KHz Part number: 09003101 S3000 RDR IP Proximity card reader Mifare® 13.56 MHz Part number: 09003102 S3000 RDR IP Proximity card reader HID® /Mifare® Part number: 09003103

www.xtralis.com

UK and Europe +44 1442 242 330 D-A-CH +49 431 23284 1 The Americas +1 781 740 2223

Middle East +962 6 588 5622 Asia +86 21 5240 0077 Australia and New Zealand +61 3 9936 7000

The contents of this document are provided on an "as is" basis. No representation or warranty (either express or implied) is made as to the completeness, accuracy or reliability of the contents of this document. The manufacturer reserves the right to change designs or specifications without obligation and without further notice. Except as otherwise provided, all warranties, express or implied, including without limitation any implied warranties of merchantability and fitness for a particular purpose are expressly excluded.

Xtralis, Xtralis logo, The Sooner You Know, VESDA, ICAM, ECO, OSID, HeiTel, ADPRO, IntrusionTrace, and LoiterTrace are trademarks and/or registered trademarks of Xtralis and/or its subsidiaries in the United States and/or other countries. Other brand names mentioned herein are for identification purposes only and may be trademarks of their respective holder(s). Your use of this document does not constitute or create a licence or any other right to use the name and/or trademark and/or label.

This document is subject to copyright owned by Xtralis. You agree not to copy, communicate to the public, adapt, distribute, transfer, sell, modify or publish any contents of this document without the express prior written consent of Xtralis.

Doc. no. 14533_04

 **xtralis**
The sooner you know®